


## Specification: BR-1013

- 3/8" diameter press to fit
- Standard 18" #22 AWG leads
- Special leads up on request
- Switch or magnet are available separately
- Resistor, Diode and Supervisory Loop available on request
- Build-in Resistors or Diodes on quest
- Colors: White, Brown, Grey

## \*\*\* Recessed Mounted



## Dimension (mm):

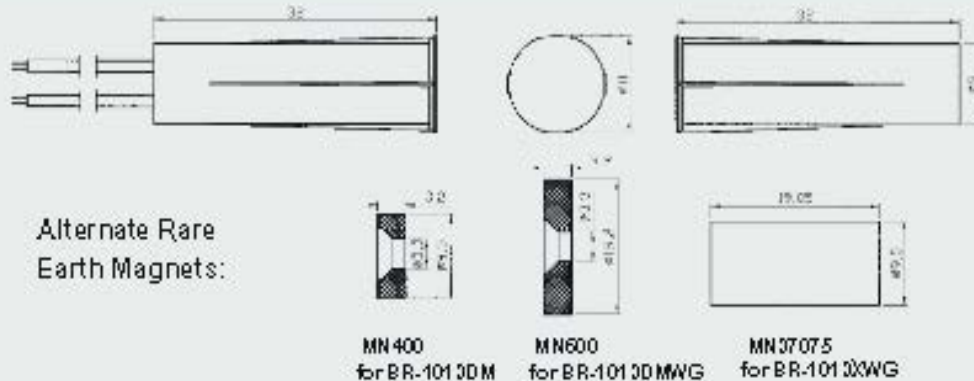

## Order Information:

Part Number	Loop Type	Reed Form	Closed Gap [Inch(mm)]	Departure Gap [Inch(mm)]	Maximum Initial Contact Resistance (Ohm)	Maximum Contact Rating (W)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)
BR-1013	Closed	N/O	1 (25)	1.1 (28)	0.150	10	100	0.5
BR-1013XWG	Closed	N/O	1 1/4 (37)	1.81 (46)	0.150	10	100	0.5
BR-1013DM	Closed	N/O	7/8 (19)	0.87 (22)	0.150	10	100	0.5
BR-1013DMWG	Closed	N/O	1 1/4 (31)	1.3 (33)	0.150	10	100	0.5
BR-1013A	Open	N/C	7/8 (22)		0.150	3	30	0.2
BR-1013C	Closed & Open	SPDT	7/8 (22)		0.150	3	30	0.2
BR-1013DMA	Open	N/C	3/4 (15)		0.150	3	30	0.2
BR-1013DMC	Closed & Open	SPDT	3/4 (15)		0.150	3	30	0.2
BR-1013DMVGA	Open	N/C	1 (25)		0.150	3	30	0.2
BR-1013DMVGC	Closed & Open	SPDT	1 (25)		0.150	3	30	0.2

\* BR-1013XWG magnetic contact switches shall be installed so that a door or other movable opening cannot be opened more than 2 inches (51mm) without initiating an alarm. Switches exceeding 2 inches cannot be installed per UL681-the Standard for Installation and Classification of Burglar and Holdup Alarm