


SHIELDED FIRE ALARM CABLE

Power Limited Fire Alarm Cable

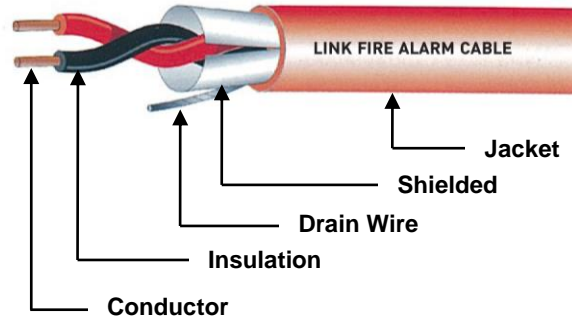

Features And Benefits

LINK shielded fire alarm cable power limited fire alarm describes one pair (2 Cores). The maximum operating voltage is 300VAC/VDC, the flame retardant is in accordance with UL1685, UL1666.

Standard Compliances

- ANSI/UL 1424, Cables for Power-Limited Fire-Alarm Circuits
- UL1685 Type FPL, UL1666 Type FPLR
- UL Listed File NO.E476400
- RoHS Compliant

Applications Support

- Fire Alarm System
- Smoke Detector
- Critical Central Fire Systems
- Control Circuits
- Security system

Electrical Characteristics

Part Number	UL/NEC Flame Rating	DCR Conductor (Ω/km)	DCR Shielded (Ω/km)	Capacitance Cond to Cond (pF/m)	Capacitance Cond to Rest (pF/m)	Maximum Current @25°C (Amps)	Voltage VAC/VDC
CB-0218	FPL	≤ 22.5	52.7	160	297	5.3	300
CB-0216	FPL	≤ 14.0	52.7	189	350	11	300
CB-0214	FPL	≤ 8.7	52.7	160	340	18	300
CB-0212	FPL	≤ 5.5	52.7	216	424	21	300
CB-0218R	FPLR	≤ 22.5	52.7	160	297	5.3	300
CB-0216R	FPLR	≤ 14.0	52.7	189	350	11	300
CB-0214R	FPLR	≤ 8.7	52.7	160	340	18	300
CB-0212R	FPLR	≤ 5.5	52.7	216	424	21	300

SHIELDED FIRE ALARM CABLE

Power Limited Fire Alarm Cable



Cable Construction

- **Conductor** Solid Bare Copper
- **Insulation** FR PVC, Black and Red Color
- **Drain Wire** 22 AWG(7*0.25 mm), Stranded Tinned Copper
- **Shielded** AL Foil, Thickness 0.038mm, 115%
- **Jacket** Lead free, FR PVC, Red Color

Part Number	Number Of Pair	Conductor Diameter		Insulation		Drain Wire (AWG)	Jacket	
		AWG	mm.	Thickness (mm)	Diameter (mm)		Thickness (mm)	Diameter (mm)
CB-0218	1	18	1.02±0.02	0.4	1.90±0.15	22	0.9	5.9±0.3
CB-0216	1	16	1.29±0.02	0.4	2.10±0.15	22	0.9	6.1±0.3
CB-0214	1	14	1.63±0.04	0.6	2.83±0.15	22	1.0	7.8±0.3
CB-0212	1	12	2.05±0.04	0.6	3.20±0.15	22	1.1	8.7±0.3
CB-0218R	1	18	1.02±0.02	0.4	1.90±0.15	22	0.9	5.9±0.3
CB-0216R	1	16	1.29±0.02	0.4	2.10±0.15	22	0.9	6.1±0.3
CB-0214R	1	14	1.63±0.04	0.6	2.83±0.15	22	1.0	7.8±0.3
CB-0212R	1	12	2.05±0.04	0.6	3.20±0.15	22	1.1	8.7±0.3

Physical Property

- **Conductor Elongation** ≥10 %
- **Insulation Tensile Strength** ≥13.8 N/mm²
- **Insulation Elongation** ≥100 %
- **Sheath Tensile Strength** ≥13.8 N/mm²
- **Sheath Elongation** ≥100 %
- **Sheath Tensile Strength After Aged** ≥50 % unaged N/mm²
- **Sheath Elongation After Aged** ≥75 % unaged
- **Temperature Range** -20°C to 105°C

Order Information

Part Number	Description	Color	Length	Package
CB-0218	FIRE ALARM, SHIELDED 2 x 18 AWG, 1 PAIR, FPL	Red	500m	Roll
CB-0216	FIRE ALARM, SHIELDED 2 x 16 AWG, 1 PAIR, FPL	Red	500m	Roll
CB-0214	FIRE ALARM, SHIELDED 2 x 14 AWG, 1 PAIR, FPL	Red	500m	Roll
CB-0212	FIRE ALARM, SHIELDED 2 x 12 AWG, 1 PAIR, FPL	Red	500m	Roll
CB-0218R	FIRE ALARM, SHIELDED 2 x 18 AWG, 1 PAIR, FPLR	Red	500m	Roll
CB-0216R	FIRE ALARM, SHIELDED 2 x 16 AWG, 1 PAIR, FPLR	Red	500m	Roll
CB-0214R	FIRE ALARM, SHIELDED 2 x 14 AWG, 1 PAIR, FPLR	Red	500m	Roll
CB-0212R	FIRE ALARM, SHIELDED 2 x 12 AWG, 1 PAIR, FPLR	Red	500m	Roll



Specifications subject to change without notice. Revised 10/2015
©Copyright 2006 are Trademark and all rights reserved.