




FIRE RESISTANT CABLE

Internal Used
(1 April 2562)



NEW

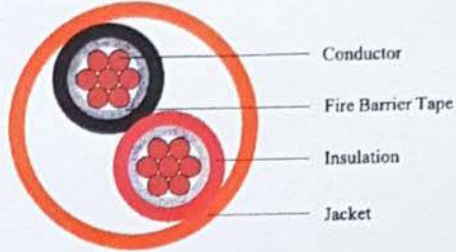

PRODUCT DESCRIPTION

- Conductor : Stranded bare copper
- Fire barrier tape
- Insulation : XLPE
- Multi cores lay-up
- Shielded : Unshielded
- Jacket : LSZH

ELECTRICAL CHARACTERISTICS

- Voltage Test : 2000 V/min
- Minimum insulation resistance at 20 °C : 2000 MΩ.km
- Fire Resistance Tests (SS299/BS 6387 Cat CWZ)
: No rupture of fuse at 950 °C for 3 hours

STANDARD COMPLIANCES

- SS299/BS 6387 Cat CWZ , IEC 60331-21
- IEC 60332-1, IEC60332-3-24
- IEC 61034-2 , IEC 60754-1 , IEC 60754-2
- IEC 602228 , IEC 60502-1

Partu Cabling - Partu INTERLINK Tel : 02-666-1111 (100 Lines)

Part No.	Conductor's Cross Section	Cores	Insulation	Insulation	Jacket	Sheath	Packaging	PRICE/ M
			Nom.Thick (mm)	Diameter (mm)	Nom.Thick (mm)	Diameter (mm)		
CB-0021	1.5mm ² (15AWG)	2	0.7	3.6	0.7	8.7	500M / Roll	38.-/ M.
CB-0025	2.5mm ² (13AWG)	2	0.8	4.2	0.8	10.5	500M / Roll	58.-/ M.
CB-0040	4.0mm ² (11AWG)	2	1.0	5.2	1.0	12.4	500M / Roll	83.-/ M.
CB-0060	6.0mm ² (9AWG)	2	1.4	6.6	1.4	15.6	500M / Roll	123.-/ M.

PRICE LIST 2562