


PS-0512

5A Switching Power Supply

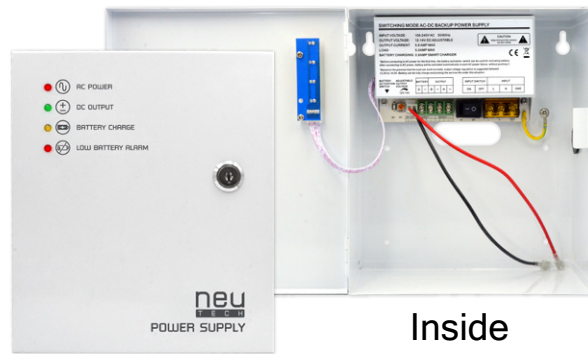

Front

Inside

Parameter	Description
AC Input Voltage Rang	100-240VAC
Input Current	1.5 A 110/240VAC
Input Frequency	60/50Hz
AC Inrush Current	30A /240VAC
DC Output Voltage	13.8V, 5A
Float Voltage	No Load: 13.8V : Charging:13.8V
DC Voltage Adj. Rang	± 2% Rated Output Voltage
Output Voltage	10% Max. When the Power On Or Off
Overshoot/Undershoot	
Charge Current	0.8A.
Discharge Current	5A.
Set up, Rise, Hold Time	3s, 50ms, 60ms
Efficiency	84% Full Load
Power Factor	0.5Min.
Protection	Short Circuit Protection, Over Current Protection Battery Low Voltage Protection, Battery Reverse Connect Protection Battery Discharge Over Current Protection
Working Temperature	-25°C - 40°C (-13°F - 104°F)
Humidity Temperature	10%RH to 90%RH
Regulatory Standards	CE , IEC
LED Staytus	LED1 Red AC Input LED2 Green DC Output LED3 Yellow Battery Charge LED4 Red Low Battery Alarm
Cabinets Dimension	195(L)x225(W)x80(H) mm