


DROP WIRE CABLE



Link for the perfect Cabling

LINK Telephone Drop Wire Cable designed for distribution cable pair from cable terminal to telephone protector.

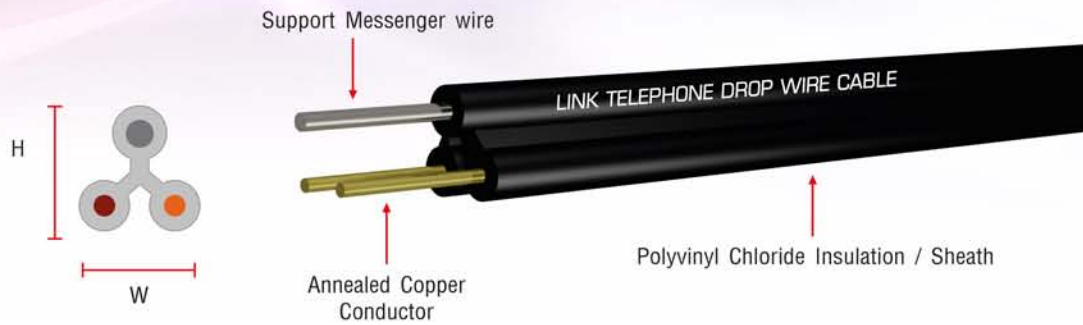

MECHANICAL SPECIFICATIONS

Conductor	Solid Annealed Copper ,19AWG (0.91 mm)
Insulation/Sheath	Polyvinyl Chloride (BLACK),UV-proof
Messenger Wire	1.2 mm ,Extra High Strength Galvanize Steel Wire

ELECTRICAL CHARACTERISTICS

1. Max.Conductor DC Resistance (Ω /km)	28.5
2. Min.Insulation Resistance (M Ω -km)	400
3. Dielectric Strength between Pairs (kV/min)	1.5

ORDER INFORMATION

LINK P/N	Number of Cores	Conductor diameter		Insulation diameter (mm.)	Overall diameter (mm.)		Packaging
		mm.	AWG		H	W	
UL-0023	2	0.91	19	1.16	6.8	8.1	200M./ Roll

JUMPER WIRE CABLE

LINK Telephone Cable Jumper Wire is designed for connecting terminal equipment.

MECHANICAL SPECIFICATIONS

Number of Pair	: 1
Wire Gage	: 24 AWG (0.5 mm.)
Conductor	: Solid Bare Copper
Insulation	: Polyvinyl Chloride (PVC)
Diameter	: 1.10 ± 0.05 mm.



LINK P/N	Description	Packaging
UL-0002	JUMPER WIRE WHITE-RED 2 CORE	100 M./Easy Box