

# BACK MOUNT FRAME (BMF)

Back Mount Frame (BMF) design as a self supporting U-Shaped with a pitch of 23 mm. It manufactures from stainless steel with high corrosion resistant steel, edge protection-stripe prevent injury during installation work. Earth connection for over-voltage protection. Certify by TOT technical specification No. OES-002-001-02




## MATERIAL

- Stainless steel 1.0 mm. thickness

## ORDER INFORMATION


LINK P/N	Depth of Base	Dimension W x H x D (mm.)	Position
UL-8201	22 mm.	103 x 20.0 x 43	1
UL-8202		103 x 42.5 x 43	2
UL-8203		103 x 65.0 x 43	3
UL-8206		103 x 132.5 x 43	6
UL-8210		103 x 222.5 x 43	10
UL-8211		103 x 245.0 x 43	11
UL-8212		103 x 267.5 x 43	12
UL-8216		103 x 357.5 x 43	16

22 mm.

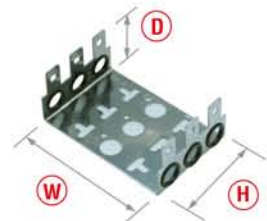

LINK P/N	Depth of Base	Dimension W x H x D (mm.)	Position
UL-8411	40 mm.	103 x 245.0 x 61	11
UL-8422		103 x 492.5 x 61	22
UL-8427		103 x 605.0 x 61	27
UL-8433		103 x 740.0 x 61	33
UL-8444		103 x 987.5 x 61	44
UL-8455		103 x 1235.0 x 61	55

40 mm.

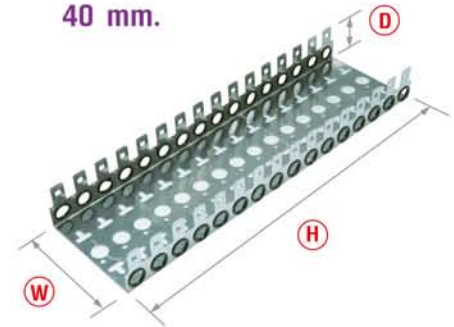

UL-8715	<b>19" BMF 15 Way Recessed for Rack-mount, 3U, 150 Pairs</b>		
	19" Rack Mountable 3U height.		
	Support 15 set telephone module.		
	Jumper cable routing.		

