



NETWORKING


F.O. MEDIA CONVERTER (RJ45→F.O.)



Fiber Cabling & Networking ... Fiber INTERLINK Tel. 02-866-1111 (100 Lines)



Mini Series , 10/100 Converter

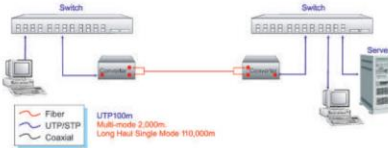

Enhance Series : 10/100 Converter

- Nway Auto-negotiation support on RJ45
- Auto MDI/MDI-X support on RJ45
- External switching power supply 12 VDC/1A
- FCC Class A & CE approved
- Extends distance ranging up to 2 km (Multimode) and up to 120 km (Singlemode)
- Stand-alone use only

- Loopback test for troubleshooting
- Link Fault Signaling feature enhance to indicate link down
- Nway Auto-negotiation support on RJ45
- Auto MDI/MDI - X support on RJ45
- Manual setting on speed and duplex for compatibility non auto-negotiation device
- Dip switch manual setting for 10 or 100 and half or full duplex in case of auto - negotiation failure
- External switching power supply 12 VDC/1A
- FCC Class A & CE approved
- Extends distance ranging up to 2 km (Multimode) and up to 120 km (Singlemode)
- Stand alone and Chassis Compliant



UT-0216MI , UT-0216MI-SM20 : 10 / 100 MINI - Industrial Converter w/ DC Power Supply



UT - 0215MI - TS20 : 10 / 100 SINGLE F.O. MINI Industrial Converter
UT - 0215MI - RS20 : 10 / 100 SINGLE F.O. MINI Industrial Converter



UT-1300A

1000 MINI Media Converter With SFP Slot



UT-1310A

10/100/1000 ENHANCE Media Converter With SFP Slot



UT-1310HA

10/100/1000 HARDENED Media Converter With SFP Slot

- Complies with IEEE 802.3u 10/100Base-TX, IEEE 802.3ab 1000Base-T and IEEE 802.3z 1000Base-SX/LX standards
- Supports Auto MDI/MDI-X on the RJ45 port
- Link-Fault Signaling With ALM LED illuminates to indicate link down
- Status LEDs for LNK (link) and ALM – for easy monitoring of device status

- Compatible with other Gigabit 1000Base-T/SX/LX devices
- External power supply
- Extends distances up to 550 m (multi-mode SX) and 120 km (long-haul single-mode LX) under full-duplex mode
- FCC Class A & CE approved

PRICE LIST 2565
129